

CONSTRUCTION COST COMPARASION BETWEEN CONVENTIONAL AND INDUSTRILISED BUILDING SYSTEM IN NASHIK

Y.B. Sangale¹, Prof. R.V. Devalkar²

¹*Department of Civil Engineering, NDMVPS's KBT, COE Nashik College, yogeshsangale2011@gmail.com*

²*Department of Civil Engineering, NDMVPS's KBT, COE Nashik College, rajanikant99@gmail.com*

Abstract- The Indian construction system is going to a transitional change from a construction industry employing conventional construction to a more modernised and advanced system. Like a pre-fabricated component system, steel framing system, block work and mould system, and timber framing system in all such system is known as the (IBS) Industrialized Building System. In this new technique of construction in order to increase the productivity of construction and improve quality of work. The system can be used good construction, equipment, materials and better project planning. This study is present and defined actual difference between conventional and industrialised building system. Which can provide the necessary information on the building cost comparison between these two system. This study also addresses the building cost comparison, more advantages and effective in between two systems. Such provides the details building cost indicates which of the two are cheaper. The data was collected through questionnaire survey from the respondent and case study in Nasik city, which consisting of residential buildings of low cost housing project in MAHADA construction. The data analysis of statistical test or average index method 'it is shown that there is a significant difference in cost saving. for the conventional & IBS system.

Keywords- construction cost comparison, industrialized building system, conventional system, project planning, average index.

I. INTRODUCTION

The industrialized Building System (IBS) construction system is old in India. It is used in India from last many years .But mostly limited or heavy structures such as bridges/flyovers Tunnels, and underground passes. Precast System was firstly used in India during the construction of foundation for Gate Way of India. An industrialized Building System (IBS) can be defined as the Building Constructed using Prefabricated Building components. It consists of Symmetrical Components which are casted in cast yards with similar moulds. The components manufactured in Cast yards are then transported on Site by using heavy vehicle, erected and assembled on site. The application of the industrialized building system (IBS) has a more advantages over the conventional method. A various examples of the advantages are the reduction of the site labours, minimization in wastage of materials, less in environmental impact and reduction in labour. The advantages showing that, IBS also provide a safety and more managed construction site, and the completion time of construction is also reduced. The IBS indirectly denoted that the its much more economical in terms of construction cost than the conventional system. And the focus of this study is to generate a

comparison between Construction cost of Conventional system and the similar building casted using Industrialized Building System and subsequently provide information guideline for the construction cost comparison for local construction site in IBS system and conventional construction system by the data generated through the interviews of general contractor, site engineer, project manager, general manager, etc and analysis the data.

II. CLASSIFICATION OF INDUSTRIALISED BUILDING SYSTEM

The study basically means the various methods employed, are as follows.

2.1 Pre-cast Concrete Framing, Panel and Box Systems.

This is the most common group of IBS products pre-cast concrete elements. It includes precast column, beam, walls, staircase, slabs, etc are constructed in mould and after placed in on site.[5]

2.2 Steel Formwork Systems.

In this type of system is low level and last prefabricated IBS system. It is made and casted on the site. Such types include better quality control and good finishes of the surface. These include less site labour and material. It include –tunnel, beam columns, tilt up system in moulding forms & steel framework. [5]

2.3 Steel Framing Systems

This system is mostly used pre-cast concrete slabs, steels columns and beams, steel framing systems. It's properly choice in the fast-track construction of skyscrapers. In modernisation of this type to design light weight steel trusses consisting of cost effective profiled cold-formed channels and steel frame system.[5]

2.4 Prefabricated Timber Framing Systems.

Such system is used in timber building frames and timber roof trusses. Then its include more popular, timber building frame systems. This system can be use and design is very interesting designs from simple dwelling unit and more aesthetical view.[5]

2.5 Block work Systems.

The general construction method is of using conventional clay bricks. In development and usage of interlocking concrete masonry lightweight concrete blocks. Its time consuming than traditional bricks-laying this is effective solution and simple to the usage and fast construction [5]

III. CONSTRUCTION COST COMPARISION

Referring to the various papers in similar topic to study & research in there are 3 signified principal are used for comparing costs of building projects.

1. Comparison standardized identical buildings.[5]
2. Comparison of standard buildings with local modifications.[5]
3. Comparison of functionally similar building. [5]

3.1. Cost

1. Material costs
2. Labour costs
3. Equipment cost
4. Overhead costs
5. Profit

3.2. Speed

The IBS construction required short construction time because most of activity are done by precast yard then on site work is minimum. In on site construction the placing and fixing the component of building. Then speed of construction is more. In less construction time then to require less labour and project can be complete within the time and to avoided overhead cost of project.

3.3. Labour

The IBS system required less labour because more activity can be done in machine operation. The Labour wages include all labour cost, like direct cost and indirect cost. The direct cost includes payment on workmen. And Indirect labour cost include payments made by a contractor on the employee's behalf, the IBS reduced the labour cost of project.

3.4 Quality

In construction industry quality is most important factor .the quality is depends upon design of building, method of construction, material of construction, and such thing affect the building cost. This is important to building appearance and aesthetical purposes to attracting to the customer.

IV. METHOD OF ANALYSIS

The case study data needed consist of the total construction cost for a particular construction project, such data can be generated through the interviews of engineers, contractors ,project manager ,general manager, architect etc. In industrialised building project. And same data can be collect on conventional building system from the chosen consultant company. This data is basically for the analysis of comparison for the two different types of the construction system. It provide indirectly information and knowledge obtained through the interview that need been done. All such data collect and analyzed by descriptive and analytical methods. This data was analyzed using the Index Average Method as follows:

$$\text{Index Average} = \frac{\sum a_i * x_i}{\sum x_i} \quad \text{Eqn.1}$$

Where: a_i = constant

x_i = variables representing respondents' frequency.

4.1. Case study

The case studies for Industrialized Building system campus. Project of MAHADA in NASHIK city near the Mahasrulgaon is a G+7-storey residential Building using IBS with a Gross Floor Area (GFA) of 1.5 hector 3 nos. Building . commanding a construction period of 14 months. construction methods, commanding a Comprising Living Room, Kitchen, WC & Bath – structure, having area 1 flat 645 sq ft(1BHK) &715sq ft(2BHK)

4.2. Results

Chart 1 Comparison of conventional and IBS system.

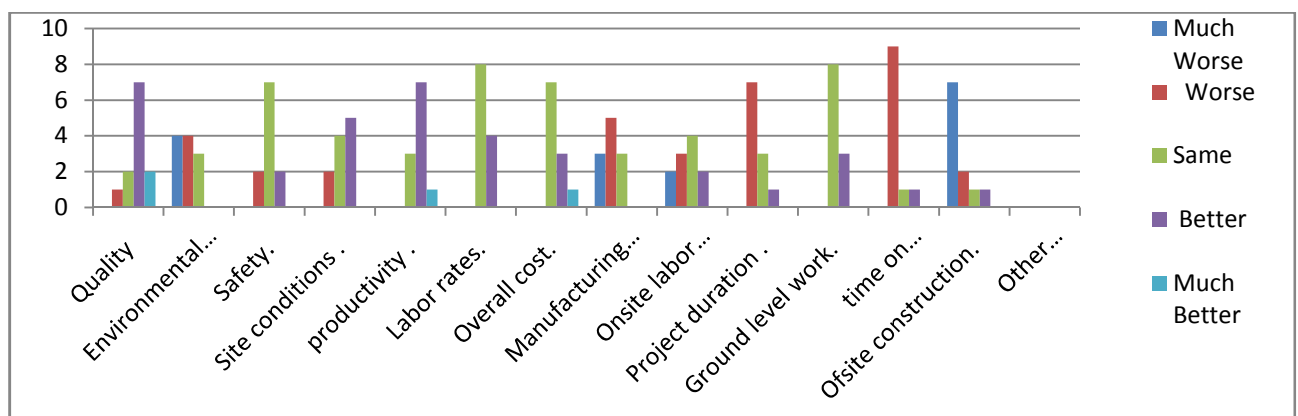


Chart 2 Rate the significance of possible impediments to the use of prefabrication.

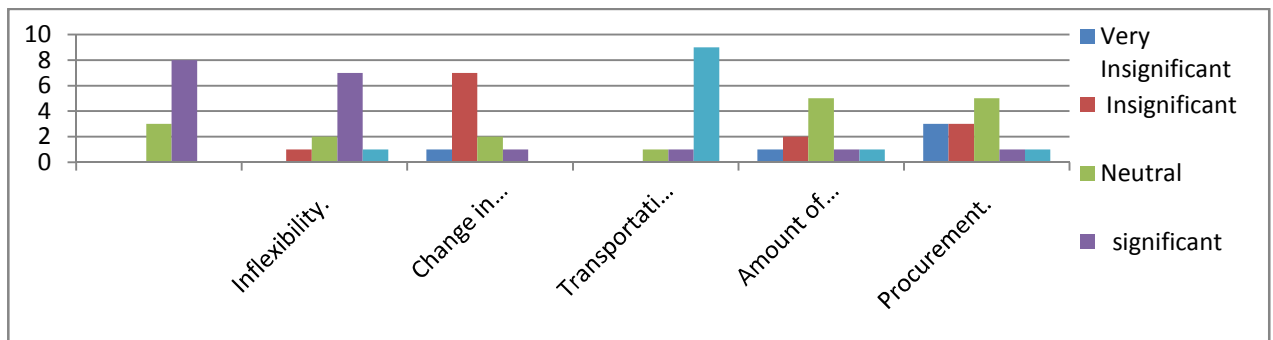


Chart 3 Cost of labour.


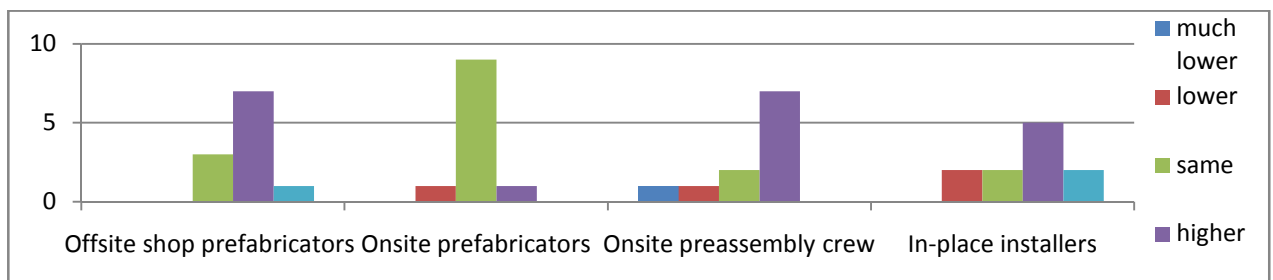


Chart 4 labour productivity

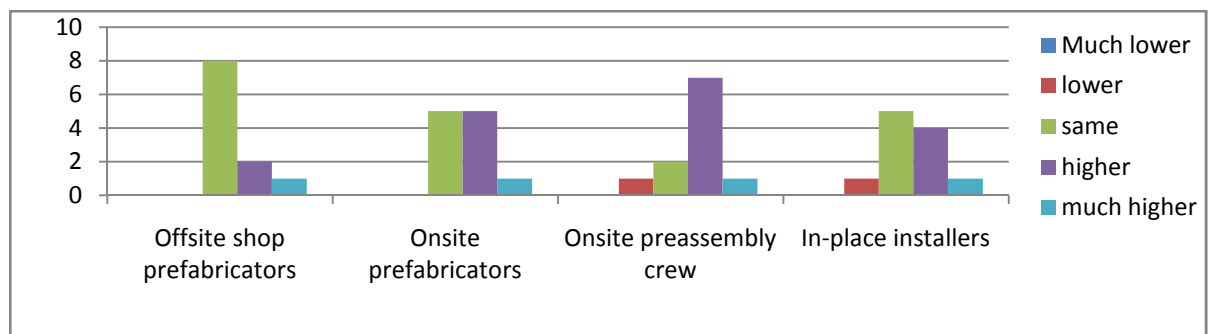

V. CONCLUSION

The study assesses the use of Industrilised building system and its impact on time, quality, waste minimization and labour usage compared to the conventional cast in-situ construction method is comparatively low. The study shows IBS is costly, But such system to increase quality, reduced time, labour, & of material. The case studies showed that the use IBS system to improved quality con beneficial. In result shows that the quality of IBS system is better, less enviroimental impact, better site condition, productivity, same labour rate, less project duration and less time from completion of project. Overall result showing of the respondent the IBS construction is more flexible as compare CBS construction.

REFERENCES

- [1] W.A.Thanoon, Lee Wah Peng, Mohd Razali Abdul Kadir, Mohd Saleh Jaafar and Mohd Sapuan Salit. "The essential characteristics of industrialized building system"
- [2] Kamarul Anuar Mohd Kamar, Zuhairi Abd Hamid, Mohamed Nor Azhari Azman, Mohd Sanusi S. AhamadI "industrialized Building System (IBS): Revisiting Issues of Definition and Classification"
- [3] Siti Mazzuana Shamsuddina, Rozana Zakariaa, Sarajul Fikri Mohamedb "Economic Attributes in Industrialised Building System in Malaysia"
- [4] Faridah Ismail, Har Einur Azrin Baharuddin Mohd Arif Marhani. "Factors towards Site Management Improvement for Industrialised Building System (IBS) Construction"
- [5] "Nuzul azam haron¹ *, salihuddin hassim², mohd. Razali Abd. Kadir³ & mohd saleh jaafar⁴" (building cost comparison between conventional And formwork system)"
- [6] Izatul laili Jabar, Faridah Ismail, Arniatul Aiza Mustafa. "Issues in Managing Construction Phase of IBS Projects."
- [7] Faridah Ismail, Norazian Mohamad Yusuwan, Har Einur Azrin Baharuddin "Management Factors for Successful IBS Projects Implementation."
- [8] CIDB. 1997. Guide to Precast Concrete and Pre-fabricated Reinforcement for Buildings. Construction Industry Development Board Report. Malaysia.

